



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 650 410 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
03.12.1997 Bulletin 1997/49

(21) Application number: 93914852.4

(22) Date of filing: 30.06.1993

(51) Int. Cl.⁶: **B30B 11/00**, B30B 15/02

(86) International application number:
PCT/GB93/01375

(87) International publication number:
WO 94/00291 (06.01.1994 Gazette 1994/02)

(54) **PROCESS FOR PRODUCTION OF MEDICAMENT FORMULATIONS**

VERFAHREN ZUR HERSTELLUNG VON ARZNEIFORMULIERUNGEN

PROCEDE DE PRODUCTION DE COMPOSITIONS POUR MEDICAMENTS

(84) Designated Contracting States:
AT BE CH DE DK ES FR GB GR IE IT LI LU MC NL
PT SE

(30) Priority: 30.06.1992 GB 9213874

(43) Date of publication of application:
03.05.1995 Bulletin 1995/18

(73) Proprietor: FISONS plc
West Malling, Kent ME19 4TA (GB)

(72) Inventors:
• LIVESLEY, David John
Elsworth, Cambridgeshire CB3 8JR (GB)
• GAYLOR, Ian Michael Daines
Ely Cambridgeshire CB7 4BJ (GB)

(74) Representative: Caffin, Lee
Rhône-Poulenc Rorer Limited,
Intellectual Property Department,
London Road
Holmes Chapel, Cheshire CW4 8BE (GB)

(56) References cited:
EP-A- 0 381 499 EP-A- 0 407 028
FR-A- 1 346 567 GB-A- 881 701
US-A- 4 039 703

• Patent Abstracts of Japan vol. 15, no. 203(M-
1116) 24 May 1991 & JP-A-30 55 206(TAIYO
SEIMITSU KK.) 11 MARCH 1991

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 650 410 B1

Description

This invention relates to a novel process for the production of a compacted body of powdered medicament, especially powdered inhalation medicament, referred to herein as a "medicament compact", of the type disclosed in Euro-
 5 European Patent Application 407028.

The administration by inhalation of medicaments in dry powder form is well known. Devices for the metering and dispensing of measured doses of medicament from a reservoir have also been described previously, for example, in UK Patent No. 2041763 and US Patent No. 2587215. Such devices typically comprise a medicament reservoir and a meter-
 10 ing chamber with a volume chosen such that, when filled, the chamber contains the desired weight of medicament for one dose. Filling of the metering chamber is generally accomplished under the influence of gravity, the chamber typically being located at the bottom of the reservoir. Such devices have the disadvantage that variations in the density of the metered powder can easily occur resulting in inaccurate or inconsistent dosing. The packing density of the powder may also depend on the weight of powder remaining in the reservoir, leading to a gradual reduction in the dose delivered by the device. In addition, the dose metered is strongly dependent on the orientation of the device.

European Patent Application 407028 discloses a device which overcomes the disadvantages of other dry powder devices by the use of a metering means which relies not on gravitational force to fill a metering chamber, but on abra-
 15 sion of a compacted body of powdered medicament. This application contemplated the use of hydraulic presses and the like in the production of the medicament compacts, by which pressure would be applied in the direction of a longitudinal axis of a sample of powdered medicament. Although this is satisfactory in many cases, in others there is a variation in the density of the medicament compact from point to point. Since the device of European Patent Application
 20 No. 407028 (in which the medicament compacts are adapted for use) functions by abrading a feed volume of the medicament compact, it is important that the density of medicament throughout the compact is as uniform as possible. If the density is uniform then slices of medicament of the same thickness abraded from the compact will contain the same amount of medicament, thus ensuring that the correct dosage of medicament is consistently administered to a patient.

International application no. WO 91/03237 describes known methods of manufacture of medicaments in respect of an oral dissolvable medicament. The methods include pressure (by ram compression), moulding, spraying and vapour
 25 deposition. Medicaments in the form of annuli on a handle and having radial segments are disclosed.

US patent no. 2 312 381 discloses a dissolvable medicament compact comprising a first annulus of a medicament such as aspirin, an intermediate shielding layer and a second annulus of an effervescent substance.

We have now found a novel process for the production of medicament compacts which overcomes or substantially
 30 mitigates the problems encountered in processes known from the prior art.

According to the present invention, there is provided a process for the production of an inhalation medicament compact, which comprises the steps of:

- a) positioning expansible means along the longitudinal axis of a mould, said mould being adapted to form all or part
 35 of the medicament reservoir of a medicament inhalation device;
- b) placing loose powdered medicament in the mould; and
- c) expanding the expansible means perpendicularly to the longitudinal axis of the mould.

Steps a) and b) may be performed in either order or simultaneously, however, we prefer them to be performed in
 40 the order shown above.

The powdered medicament is preferably metered into the mould, e.g. by weighing the desired amount of medicament. Alternatively, medicament compacts of the desired total mass may be produced by cutting to the appropriate
 45 length.

After performing steps a) and b), or during step b), it is preferable to vibrate the mould assembly and/or action a levelling device. This ensures that the medicament has settled to a level height i.e. that the top surface of the medica-
 50 ment is even, and is of known volume prior to compaction. Vibration of the mould assembly may be achieved using the base unit of a vibratory bowl feeder, this provides axial vibration of adjustable amplitude.

During vibration of the mould assembly it is desirable that any loose parts of the assembly should be held in posi-
 55 tion, this may be accomplished by using a vacuum to hold such parts in place.

Suitable expansible means for use in the process according to the invention include an expansible mandrel, for example, a cylindrical mandrel capable of radial expansion. The cylindrical mandrel may comprise a plurality of seg-
 60 ments capable of radial movement, in the retracted state the segments form a complete cylinder and in the expanded state gaps are present between the segments. The mandrel preferably has from 2 to 12, for example, 6 segments.

When the medicament compact is to be administered from a device according to European Patent Application 407028 which, for a single dose, abrades a cylindrical compact for a predetermined angle of less than 360° around the longitu-
 65 dinal axis, then the mandrel preferably has the same number of segments as there are doses in a 360° rotation about the longitudinal axis of the compact. For example if the device abrades the compact for 60° about the longitudinal axis for a single dose then the expanding mandrel preferably has 6 segments. This minimises the effects of any irregularities

in the internal configuration of the compact.

Outward radial movement of the segments may be produced by a wedging action using e.g. pistons and/or by inflation of a bag placed at the centre of the mandrel. Inflation of the bag may be achieved using compressed gas, e.g. air; or hydraulically.

5 The degree of expansion of the mandrel will depend upon the desired size and density of the medicament compact, for example, the mandrel may expand from a diameter of 16 mm to 20 mm.

The outer surface of the mandrel is preferably covered by an elastomeric sleeve. The sleeve prevents ingress of powder into the expansible means. The elastomeric sleeve may be made of any material which exhibits a suitable degree of elasticity, e.g. vulcanised rubber. In addition to a suitable degree of elasticity, the elastomeric material should
10 be non-toxic and preferably has a high degree of tear resistance and is easily moulded. The elastomeric material is preferably a vulcanised elastomer suitable for drug contact, for example, a natural rubber or silicone rubber compound.

As the elastomeric sleeve expands radially its thickness reduces and there may be a tendency for it to shorten in length. It is desirable for the sleeve to remain a constant length, so it is preferable that the ends of the sleeve turn inwards towards the longitudinal axis of the mandrel. This may help to prevent axial shortening in two ways, firstly, it
15 grips onto the ends of the mandrel segments, thus restricting shrinkage by shear forces; secondly, as it expands and its outer diameter increases, radial tension is generated which tries to pull the cylinder edges in towards the axis.

As the mandrel expands the elastomeric sleeve may tend to flatten across the gaps which open up between the segments. This effect may be reduced by applying a pressure, e.g. of 5 bar, to the interior of the elastomeric sleeve, thus allowing it to be inflated relative to the expansible means. At other times it is desirable to maintain a lower pressure,
20 e.g. 0.5 bar, within the elastomeric sleeve, this pressure helps to prevent the ingress of powder into the expansible mandrel.

Other expansible means which may be mentioned include inflatable means such as inflatable bags, inflation of the bag may be achieved using compressed gas, e.g. air; or hydraulically.

The pressure exerted by the expansible means will depend upon the desired density of medicament in the compact
25 (by density of medicament we mean the mass of medicament per unit volume). However, the expansible means typically exerts a pressure of from 60×10^3 to $2000 \times 10^3 \text{ N.m}^{-2}$, for example $900 \times 10^3 \text{ N.m}^{-2}$.

The density of the medicament in the compacts produced according to the invention will depend *inter alia* upon medicament used. However, a typical compact may have a density of from 0.1 to 1.5 g/cm³, preferably from 0.4 to 0.8 g/cm³. The density of the medicament compacts produced according to the invention may be determined by weighing
30 a fixed volume of medicament abraded from the compact.

We prefer the medicament compact to be formed in a mould which subsequently forms all or part of the medicament reservoir of a medicament inhalation device. Thus, after compaction the compact and mould are in a form suitable for direct transfer to the inhalation device. By obviating the need to remove the compact from the mould prior to its insertion in the device, handling of the medicament compact, and hence the risk of contamination or loss of medicament
35 through premature abrasion, is reduced.

After production the compact may be transferred directly to the inhalation device from which it is to be administered, alternatively the compacts may be packaged separately thus providing replacement medicament reservoirs for the device from which they are to be administered.

According to a second aspect, the invention provides the novel apparatus described herein for carrying out the first
40 aspect of the invention.

Therefore we provide an apparatus for the production of an inhalation medicament compact from loose powdered medicament which comprises:

- a) a mould having a longitudinal axis adapted to receive loose powdered medicament, said mould being adapted
45 to form all or part of the medicament reservoir of a medicament inhalation device;
- b) expansible means adapted to be positioned along the longitudinal axis of the mould, and
- c) means for expanding the expansible means perpendicularly to the longitudinal axis of the mould.

The process according to the invention may further be combined with the axial compaction process envisaged in
50 European Patent Application 407028, thus allowing the formation of compacted annuli one on top of the other. When axial compaction is used the process must also include rotation of the compact relative to the expansible means of the mould in order to release the compact from the expansible means.

The process of the invention has the advantage that it produces medicament compacts having a more uniform density than compacts produced by prior art processes. In particular the density of the material at a given radius from the
55 longitudinal axis of the compact will be the same throughout the compact, although the density at different radii need not be the same, such medicament compacts are novel. Medicament compacts having such a density distribution are advantageous in that sequential volumes of medicament abraded from the compact, e.g. by the device disclosed in European Patent Application 407028, will have similar masses, thus resulting in improved uniformity of dose administered to the patient.

The process is also advantageous in that it allows medicament compacts to be produced in a single rather than a multi-step compaction procedure, it also allows the production of longer compacts having a more uniform density distribution. The process also ensures good adhesion of the medicament to the wall of the powder chamber, this is advantageous when the medicament is formed in a mould which subsequently form all or part of the medicament reservoir of an inhalation device since it prevents the compact slipping during abrasion.

The invention further provides a medicament compact produced by a process according to the invention.

According to further aspect of the invention we provide a compact of powdered inhalation medicament characterised in that the compact is annular in shape and the density at all points at a given radius from the longitudinal axis of the compact is substantially the same throughout its length.

Medicament compacts according to these further aspects of the invention will usually be annular, i.e. cylindrical with a cylindrical inner space. The radial thickness of the medicament in such a medicament compact is preferably in the range of 0.2 to 20 mm, more preferably 0.5 to 5 mm, for example 2 mm. The cylindrical inner space preferably has a diameter of more than 10 mm and preferably less than 100 mm, for example 20 mm.

The length of the medicament compact will depend on its intended use and the number of doses of active ingredient it contains. For administration from a device as disclosed in European Patent Application No. 407028, a suitable length will be in the range 5 to 50 mm, e.g. 20 mm.

Active ingredients which may be incorporated in compacts according to the invention include any active ingredients which are conventionally administered by inhalation in powdered form. Such active ingredients include drugs for use in the prophylactic or remedial treatment of reversible obstructive airways disease. Specific active ingredients which may be mentioned include salts of cromoglycic acid, e.g. sodium cromoglycate; salts of nedocromil, e.g. nedocromil sodium; inhaled steroids such as beclomethasone dipropionate, tiopredane, budesonide and fluticasone; anticholinergic agents such as ipratropium bromide; bronchodilators, e.g. salmeterol, salbutamol, reproterol, terbutaline, isoprenaline and fenoterol, and salts thereof. If desired a mixture of active ingredients, for example, a mixture of sodium cromoglycate and a bronchodilator, such as salbutamol, reproterol, isoprenaline, terbutaline, fenoterol or a salt of any one thereof, may be used.

Other active ingredients that may be mentioned include antihistamines, e.g. clemastine, pentamidine and salts thereof, acetyl- β -methylcholine bromide; peptide hormones, e.g. insulin and amylin; bradykinin antagonists; PLA₂ inhibitors; PAF antagonists; lipoxigenase inhibitors; leukotriene antagonists; CNS active drugs, e.g. NMDA antagonists, glutamate antagonists, CCK agonists and antagonists; macrolide compounds, e.g. FK 506, rapamycin, cyclosporin and structurally related compounds; vitamins; vaccines, e.g. MMR vaccine and polio vaccine; and vectors for gene therapy, e.g. plasmids containing genes intended to correct genetic disorders such as cystic fibrosis.

The particles of active ingredient incorporated into the medicament compacts according to the invention preferably have a mass median diameter in the range 0.01 to 15 μ m. We prefer that at least 80% w/w and preferably at least 90% w/w of the particles of active ingredient are less than 20 μ m, more preferably less than 10 μ m, especially less than 7 μ m in diameter. The proportion of particles of active ingredient having a diameter in the range 2 to 15 μ m is preferably more than 80% w/w.

The particulate active ingredient may be prepared by any suitable technique, as will be known to those skilled in the art. Suitable techniques include milling, e.g. using a hammer or fluid energy mill, micronisation, spray drying and freeze drying.

The medicaments to be compacted according to the invention may comprise a solid pharmaceutically acceptable carrier substance in addition to an active ingredient. The carrier preferably has an effective particle size of from 10 to 100 μ m.

The term "effective particle size" is used to denote the apparent particle size of a body without distinction as to the number of individual particles which go to make up that body i.e. no distinction is made between a single particle of given size and an agglomerate of the same size which is composed of finer individual particles.

The solid pharmaceutically acceptable carrier in the medicament will generally be a non-toxic material chemically inert to the active ingredient but may, if so desired, also comprise larger particles of the active ingredient. Examples of carriers which may be used in the medicament compacts include dextrans, glucose, mannitol and lactose. A particularly preferred carrier is crystalline lactose.

The particulate carrier may be prepared by grinding the carrier and subsequently separating out the desired fraction by conventional methods, e.g. by air classification and sieving.

The medicament may be prepared by mixing the ingredients together in a mixer, e.g. a planetary or other stirred mixer, prior to formation of the compact according to the process of the invention.

When the medicament comprises a solid carrier, we prefer the proportion of active ingredient to be from 0.1 to 70% w/w, more preferably from 0.1 to 55% w/w, and especially from 5 to 50% w/w of the medicament.

The medicament compacts according to the invention may also contain other ingredients such as flavouring agents, sweetening agents or colourants.

Any conventional pharmaceutically acceptable flavouring agents may be used, particular flavouring agents which may be mentioned include volatile oils, e.g. peppermint oil; and menthol. The proprietary product known by the trade-

name Dentomint, which contains both peppermint oil and menthol, may also be used. We prefer the flavouring agent to be peppermint oil BP/Ph. Eur.

We prefer the flavouring agent to be a polysaccharide entrapped flavouring agent such as those disclosed in International Patent Application No. PCT/GB93/00503. Polysaccharide entrapped flavouring agents are advantageous for use in the compacts produced according to the invention since they are sufficiently resilient to sustain the compression forces required to produce the medicament compacts without releasing the flavouring agent entrapped therein to any significant extent.

Sweetening agents which may be used include any conventional sweetening agents, particular sweetening agents which may be mentioned include saccharin sodium, mannitol, aspartame, cyclamates and sugar.

The medicament compacts produced according to the invention preferably contain a plurality of doses of active ingredient. The actual number of doses incorporated into the compacts will depend *inter alia* upon the length of the compact, the nature of the active ingredient and the device from which it is to be administered. However, the compacts will typically comprises from 20 to 250, e.g. 112 doses of active ingredient.

The following non-limitative examples illustrate medicament compositions suitable for use in the process according to the invention:

Example 1

Ingredients	% w/w
Nedocromil sodium (milled)	50
Flavoured polysaccharide (85% maltodextrin : 15% peppermint oil)	5
Lactose to	100

Example 2

Ingredients	% w/w
Nedocromil sodium (milled)	50
Flavoured polysaccharide (85% maltodextrin : 15% peppermint oil)	5
Saccharin sodium	1.25
Lactose to	100

Example 3

Ingredients	% w/w
Tipredane (micronised)	10
Lactose to	100

The process of the invention may be adapted to form medicament compacts comprising concentric annuli of differ-

ent drugs and/or carrier substances. The process may use any number of different expansible means to achieve the desired combination of densities and annular thickness. A compact suitable for the administration of a combination drug therapy may therefore comprise a first annulus of active ingredient A, an intermediate annulus of a carrier substance, e.g. lactose, and a final annulus of active ingredient B; the intermediate annulus of carrier substance serving to separate the two active ingredients thus preventing unwanted interactions which may occur during storage. Combination drug therapy compacts may contain, for example, a mixture of sodium cromoglycate and a bronchodilator, such as salbutamol or reproterol.

The shape of the expansible means may also be changed so as to form annuli of different configurations, for example, with internal spaces of elliptical cross section. The internal walls of the compact may also be tapered, thereby forming medicament compacts in which the dose of medicament is gradually increased or decreased as subsequent doses are administered. As a further alternative medicament compacts comprising radial segments of different drugs and/or carrier substances may be produced.

The invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is a longitudinal section of an apparatus for performing the process according to the invention;

Figure 2 is a sectional view on the line II-II of Figure 1;

Figures 3 to 8 schematically show the production of a medicament compact according to the process of the invention;

Figures 9a) and 9b) show perspective views of different medicament compacts produced according to the invention;

Figures 10a) and 10b) show vertical sections of the medicament compacts of Figures 9a) and 9b) respectively.

Referring firstly to Figures 1 and 2: the compaction apparatus (1) is supported on a base plate (2) which is mounted on a vibratory unit (not shown). A central shaft (3) is fitted into the base plate and locked in position by the housing (4) for air port (P_1). Housing (5) defining a cylindrical space (6) is fitted around central shaft (3). Moulding chamber (7) is supported within housing (5) on three radially spaced pegs, only one of which is illustrated, (8).

A cylindrical expansible mandrel (9) comprising six radially moveable segments (10) is positioned on central shaft (3). A cylindrical elastomeric sleeve (11) is fitted over segments (10). The ends of elastomeric sleeve (11) have a protruding lip (12, 13) which fits over the ends of segments (10), this helps to prevent uneven thinning of the sleeve (11) during expansion of the mandrel (9). The inner surface of moulding chamber (7) and the outer surface of the elastomeric sleeve (11) define the sides of the annular space (14) within which the medicament is compacted.

Pistons (15, 16) are slidably mounted on central shaft (3) and are driven by pressure differences across the piston heads (17, 18). The pistons (15, 16) slide against the inside of the segments (10) to achieve expansion of the mandrel.

Funnel (19) is removably attached to the top of housing (5) and can be clamped to the upper surface of the housing (5) under the action of vacuum (V_1).

Shroud (20), which provides the upper limiting face for compacting space (15), is removably attached to the upper surface of the housing (5) and can be held in position under the action of vacuum (V_2).

Referring now to Figures 3 to 8 which illustrate the production of a medicament compact:

The expansible mandrel (9) is positioned along the longitudinal axis of the inner space (6) within housing (5) and a low pressure, e.g. 0.5 bar, is applied to air port (P_2) to give a positive pressure inside the elastomeric sleeve (11) - Figure 3.

Moulding chamber (7) defining a cylindrical inner space is then fitted into housing (5) over the expansible mandrel (9) - Figure 4.

Filling funnel (19) is fitted onto the moulding chamber (7) and vacuum (V_1) is turned on - Figure 5.

The vibratory system (not shown) is switched on and a known mass of loose powdered medicament (21) is metered into compacting space (14) between the elastomeric sleeve (11) and moulding chamber (7). The moulding chamber (7) is then vibrated until the powder settles to its "tapped density" - Figure 6.

Shroud (20) is then fitted onto the housing (5) and allowed to drop onto the surface of the powder. The vibratory system is switched off and vacuum (V_2) turned on to clamp shroud (20) in position - Figure 7.

High pressure, e.g. 10 bar, is applied to central shaft (3) via air port (P_1) thus increasing the air pressure behind piston heads (17, 18) and driving pistons (15, 16). The pistons (15, 16) slide against the inside of segments (10) and expand mandrel (9), thus reducing the radial separation of elastomeric sleeve (11) from the walls of moulding chamber (7) and compacting the medicament. The air pressure applied to the air port (P_2) is then increased, e.g. to 5 bar, to inflate the elastomeric sleeve (11) and make the powder compact more circular - Figure 8.

The air supply (P_1) is then turned off reducing the pressure on pistons (15, 16) and the internal pressure applied to air port (P_2) reduced to e.g. 0.5 bar. Both vacuum supplies (V_1 , V_2) are also turned off. The shroud (20) and funnel (19) are then removed, leaving the medicament compact (22) in moulding chamber (7). Moulding chamber (7) with medicament compact (22) therein may then be removed from the housing (5) and assembled directly into a medicament inha-

lation device.

Figures 9a) and 10a) show a medicament compact (23) suitable for use in combination therapy. Three consecutive radial compressions are used to form an annulus of drug A (24), followed by an annulus of lactose (25), and finally an annulus of drug B (26).

5 Figures 9b) and 10b) show a medicament compact where the dose of drug gradually increases on passing down the medicament compact. A tapered expansible means is used to form a tapered annulus of the carrier lactose (27), followed by a non-tapered expansible means to form an annulus of drug A (28).

Claims

10

1. A process for the production of an inhalation medicament compact, which comprises the steps of:

- a) positioning expansible means (9) along the longitudinal axis of a mould (7), said mould (7) being adapted to form all or part of the medicament reservoir of a medicament inhalation device;
- 15 b) placing loose powdered medicament in the mould (7); and
- c) expanding the expansible means (9) perpendicularly to the longitudinal axis of the mould (7).

2. A process according to Claim 1, wherein the expansible means comprises an inflatable bag.

20 3. A process according to Claim 1, wherein the expansible means is an expansible mandrel (9).

4. A process according to Claim 3, wherein the expansible mandrel (9) is a cylindrical mandrel comprising a plurality of segments (10) capable of radial movement.

25 5. A process as claimed in Claim 4 wherein the mandrel has from 2 to 12 segments.

6. A process according to Claim 4 or 5, wherein the mandrel (9) has the same number of segments (10) as there are doses in a 360° rotation about the longitudinal axis of the compact (22) produced by the process.

30 7. A process according to any one of the preceding claims, wherein the expansible means (9) is covered by an elastomeric sleeve (11).

8. A process according to Claim 7, wherein the elastomeric sleeve (11) comprises a natural rubber or a silicon rubber compound.

35

9. A process according to Claim 7 or 8, wherein the elastomeric sleeve (11) can be inflated relative to the expansible means (9).

40 10. A process according to any one of the preceding claims, wherein the expansible means (9) is expanded by the action of air driven pistons (15, 16).

11. A process as claimed in any preceding claim wherein after or during step (b) the medicament is settled to a level height.

45 12. A process as claimed in Claim 11 wherein the medicament is settled by vibration of the mould.

13. A process as claimed in Claim 3 wherein the diameter of the mandrel expands from 16 to 20 mm.

50 14. A process as claimed in any preceding claim wherein the expansible means exerts a pressure of from 60×10^3 to $2000 \times 10^3 \text{ N m}^{-2}$.

15. A process as claimed in any preceding claim wherein the compact produced is packaged to provide a replacement medicament reservoir for an inhalation device from which the medicament is to be administered.

55 16. A process as claimed in any preceding claim wherein the active ingredient is selected from one or more of salts of cromoglycic acid; salts of nedocromil; inhaled steroids; anticholinergic agents; bronchodilators and salts thereof; antihistamines; peptide hormones; bradykinin antagonists; PLA₂ inhibitors; PAF antagonists; glutamate antagonists; CK antagonists and agonists; macrolide compounds; vitamins; vaccines; and vectors for gene therapy.

17. A process as claimed in any preceding claim adapted to form a medicament compact (23) wherein the density of the compact at a given radius from the longitudinal axis of the compact is the same throughout its length.
18. A process as claimed in any preceding claim adapted to form medicament compacts (23) comprising concentric annuli of different active ingredients and/or carrier substances.
19. A process as claimed in any one of Claims 1 to 17 adapted to form medicament compacts (23) comprising radial segments of different active ingredients and/or carrier substances.
20. A medicament compact (23) comprising concentric annuli of different active ingredients and/or carrier substances obtainable by the process of Claim 18 when dependent on Claim 17.
21. A medicament compact (23) as claimed in Claim 20 comprising a first annulus of active ingredient A (24), an intermediate annulus of a carrier substance (25) separating the first annulus from a second annulus of active ingredient B (26).
22. A medicament compact (23) as claimed in Claim 21 wherein the ingredient A is sodium cromoglycate and the ingredient B is a bronchodilator.
23. A medicament compact (23) comprising radial segments of different active ingredients and/or carrier substances obtainable by the process of Claim 19 when dependent on Claim 17.
24. A medicament compact as claimed in any one of Claims 20 to 23 wherein the compact is annular and the internal walls of the compact are tapered whereby the dose of medicament is gradually increased or decreased as subsequent doses are administered.
25. An apparatus for the production of an inhalation medicament compact (22) from loose powdered inhalation medicament which comprises:
 - a) a mould (7), having a longitudinal axis adapted to receive loose powdered medicament, said mould (7) being adapted to form all or part of the medicament reservoir of a medicament inhalation device;
 - b) expansible means (9) adapted to be positioned along the longitudinal axis of the mould (7); and
 - c) means (15,16) for expanding the expansible means (9) perpendicularly to the longitudinal axis of the mould (7).
26. Apparatus as claimed in Claim 25 and further comprising a vibrator or levelling device to settle the medicament to a level height.

Patentansprüche

1. Verfahren zur Herstellung eines Inhalationsmedikament-Preßkörpers, welches die Schritte umfaßt:
 - a) Positionieren von expandierbaren Mitteln (9) entlang der Längsachse einer Form (7), wobei die Form (7) so ausgelegt ist, daß sie den gesamten oder einen Teil des Medikamentenvorratsbehälters einer Medikament-Inhalationsvorrichtung bildet;
 - b) Placieren von lose, pulverisiertem Medikament in der Form (7); und
 - c) Expandieren der expandierbaren Mittel (9) normal zur Längsachse der Form (7).
2. Verfahren nach Anspruch 1, wobei das expandierbare Mittel einen aufblasbaren Beutel aufweist.
3. Verfahren nach Anspruch 1, wobei das expandierbare Mittel ein expandierbarer Dorn (9) ist.
4. Verfahren nach Anspruch 3, wobei der expandierbare Dorn (9) ein zylindrischer Dorn ist, der eine Mehrzahl von Segmenten (10) aufweist, die radial bewegbar sind.
5. Verfahren nach Anspruch 4, wobei der Dorn 2 bis 12 Segmente hat.

6. Verfahren nach Anspruch 4 oder 5, wobei der Dorn (9) dieselbe Anzahl von Segmenten (10) hat, als Dosen in einer 360°-Drehung um die Längsachse des mittels des Verfahrens hergestellten Preßkörpers (22) vorhanden sind.
7. Verfahren nach einem der vorhergehenden Ansprüche, wobei das expandierbare Mittel (9) von einer Elastomerhülse (11) bedeckt ist.
8. Verfahren nach Anspruch 7, wobei die Elastomerhülse (11) eine Naturgummi- oder eine Silikongummiverbindung aufweist.
9. Verfahren nach Anspruch 7 oder 8, wobei die Elastomerhülse (11) gegenüber dem expandierbaren Mittel (9) aufgeblasen werden kann.
10. Verfahren nach einem der vorhergehenden Ansprüche, wobei das expandierbare Mittel (9) durch die Wirkung von luftgetriebenen Kolben (15, 16) expandiert wird.
11. Verfahren nach einem vorhergehenden Anspruch, wobei nach oder während des Schritts (b) Medikament auf eine nivellierte Höhe abgesetzt wird.
12. Verfahren nach Anspruch 11, wobei das Medikament durch Vibration der Form abgesetzt wird.
13. Verfahren nach Anspruch 3, wobei der Durchmesser des Dorns von 16 auf 20 mm expandiert wird.
14. Verfahren nach einem vorhergehenden Anspruch, wobei das expandierbare Mittel einen Druck von 60×10^3 bis $2000 \times 10^3 \text{ N. m}^2$ ausübt.
15. Verfahren nach einem vorhergehenden Anspruch, wobei der erzeugte Preßkörper verpackt wird, um einen Ersatzmedikament-Vorratsbehälter für eine Inhalationsvorrichtung zu schaffen, aus welchem das Medikament verabreicht werden soll.
16. Verfahren nach einem vorhergehenden Anspruch, wobei das aktive Ingrediens ausgewählt ist aus einem oder mehreren von Salzen der Chromglycinsäure; Salzen von Nedocromil; inhalierten Steroiden; anticholinergischen Mitteln; Bronchodilatoren und Salzen davon; Antihistaminen; Peptidhormonen; Bradykinin-Antagonisten; PLA_2 -Inhibitoren; PAF-Antagonisten; Glutamat-Antagonisten; CK-Antagonisten und Agonisten; Makrolid-Verbindungen; Vitaminen; Vakzinen; und Vektoren für Gentherapie.
17. Verfahren nach einem vorhergehenden Anspruch zur Bildung eines Medikament-Preßkörpers (23), wobei die Dichte des Preßkörpers an einem gegebenen Radius von der Längsachse des Preßkörpers über die gesamte Länge dieselbe ist.
18. Verfahren nach einem vorhergehenden Anspruch zur Bildung von Medikament-Preßkörpern (23), welche konzentrische Ringe verschiedener aktiver Ingredienzen und/oder Trägersubstanzen aufweisen.
19. Verfahren nach einem der Ansprüche 1 bis 17 zur Bildung von Medikament-Preßkörpern (23), die radiale Segmente verschiedener aktiver Ingredienzen und/oder Trägersubstanzen aufweisen.
20. Medikament-Preßkörper (23), welcher konzentrische Ringe verschiedener aktiver Ingredienzen und/oder Trägersubstanzen aufweist, erhältlich mittels des Verfahrens von Anspruch 18 in Abhängigkeit von Anspruch 17.
21. Medikament-Preßkörper (23) nach Anspruch 20, welcher einen ersten Ring aus aktivem Ingrediens A (24) aufweist, wobei ein intermediärer Ring aus Trägersubstanz (25) den ersten Ring von einem zweiten Ring aus aktivem Ingrediens B (26) trennt.
22. Medikament-Preßkörper (23) nach Anspruch 21, wobei das Ingrediens A Natriumchromglykat und das Ingrediens B ein Bronchodilatator ist.
23. Medikament-Preßkörper (23), welcher radiale Segmente verschiedener aktiver Ingredienzen und/oder Trägersubstanzen aufweist, erhältlich mittels des Verfahrens von Anspruch 19 in Abhängigkeit von Anspruch 17.
24. Medikament-Preßkörper nach einem der Ansprüche 20 bis 23, wobei der Preßkörper ringförmig ist und die Innen-

wände des Preßkörpers verjüngt sind, wodurch die Medikamentdosis bei Verabreichung aufeinanderfolgender Dosen allmählich erhöht oder verringert wird.

25. Vorrichtung zur Herstellung eines Inhalationsmedikament-Preßkörpers (22) aus losem, pulverisiertem Inhalationsmedikament, welche aufweist:

- a) eine Form (7) mit einer Längsachse zur Aufnahme von losem, pulverisiertem Medikament, wobei die Form (7) so ausgelegt ist, daß sie den gesamten oder einen Teil des Medikamentenvorratsbehälters einer Medikamentinhalationsvorrichtung bildet;
- b) expandierbare Mittel (9), die entlang der Längsachse der Form (7) positionierbar sind, und
- c) Mittel (15, 16) zum Expandieren der expandierbaren Mittel (9) normal zur Längsachse der Form (7).

26. Vorrichtung nach Anspruch 25, welche weiters eine Vibrations- oder Glättvorrichtung aufweist, um das Medikament auf eine nivellierte Höhe abzusetzen.

Revendications

1. Procédé de production d'un comprimé de médicament pour inhalation, comprenant les étapes consistant à :

- a) positionner un élément expansible (9) le long de l'axe longitudinal d'un moule (7), ledit moule (7) étant adapté pour former tout ou partie du réservoir à médicament d'un appareil d'inhalation de médicament;
- b) placer le médicament en poudre en vrac dans le moule (7), et
- c) élargir l'élément expansible (9) perpendiculairement à l'axe longitudinal du moule (7).

2. Procédé suivant la revendication 1, dans lequel l'élément expansible comprend un sac gonflable.

3. Procédé suivant la revendication 1, dans lequel l'élément expansible est un mandrin expansible (9).

4. Procédé suivant la revendication 3, dans lequel le mandrin expansible (9) est un mandrin cylindrique comprenant une pluralité de segments (10) capables de mouvements radiaux.

5. Procédé suivant la revendication 4, dans lequel le mandrin comporte de 2 à 12 segments.

6. Procédé suivant la revendication 4 ou 5, dans lequel le mandrin (9) a le même nombre de segments (10) qu'il y a de doses dans une rotation de 360° autour de l'axe longitudinal du comprimé (22) produit par le procédé.

7. Procédé suivant l'une quelconque des revendications précédentes, dans lequel l'élément expansible (9) est revêtu d'un manchon en élastomère (11).

8. Procédé suivant la revendication 7, dans lequel le manchon en élastomère (11) comprend un composé de caoutchouc naturel ou de caoutchouc silicone.

9. Procédé suivant la revendication 7 ou 8, dans lequel le manchon en élastomère (11) peut être gonflé par rapport à l'élément expansible (9).

10. Procédé suivant l'une quelconque des revendications précédentes, dans lequel l'élément expansible (9) est dilaté par l'action de pistons à air comprimé (15, 16).

11. Procédé suivant l'une quelconque des revendications précédentes, dans lequel après ou durant l'étape (b), le médicament est déposé à une hauteur nivelée.

12. Procédé suivant la revendication 11, dans lequel le médicament est déposé par vibration du moule.

13. Procédé suivant la revendication 3, dans lequel le diamètre du mandrin se dilate de 16 à 20 mm.

14. Procédé suivant l'une quelconque des revendications précédentes, dans lequel l'élément expansible exerce une pression de 60×10^3 à $2000 \times 10^3 \text{ N.m}^{-2}$.

15. Procédé suivant l'une quelconque des revendications précédentes, dans lequel le comprimé produit est emballé

pour fournir un réservoir à médicament de rechange pour un appareil pour inhalation à partir duquel le médicament doit être administré.

16. Procédé suivant l'une quelconque des revendications précédentes, dans lequel l'ingrédient actif est sélectionné parmi un ou plusieurs parmi les sels de l'acide cromoglycique; sels du nedocromil; stéroïdes inhalés; agents anticholinergiques; bronchodilatateurs et leurs sels; antihistaminiques; hormones peptidiques; antagonistes de la bradykinine; inhibiteurs du PLA₂; antagonistes du FAP; antagonistes du glutamate; agonistes et antagonistes de la CCK; composés macrolides; vitamines; vaccins; et vecteurs de thérapie génique.
17. Procédé suivant l'une quelconque des revendications précédentes, adapté pour former un comprimé de médicament (23) dans lequel la masse spécifique du comprimé, à un rayon donné par rapport à l'axe longitudinal du comprimé, est la même sur toute sa longueur.
18. Procédé suivant l'une quelconque des revendications précédentes, adapté pour former des comprimés de médicament (23) comprenant des anneaux concentriques de différents ingrédients actifs et/ou substances vectrices.
19. Procédé suivant l'une quelconque des revendications 1 à 17, adapté pour former des comprimés de médicament (23) comprenant des segments radiaux de différents ingrédients actifs et/ou substances vectrices.
20. Comprimé de médicament (23) comprenant des anneaux concentriques de différents ingrédients actifs et/ou substances vectrices, que l'on peut obtenir par le procédé de la revendication 18 sous la dépendance de la revendication 17.
21. Comprimé de médicament (23) suivant la revendication 20, comprenant un premier anneau d'ingrédient actif A (24), un anneau intermédiaire de substance vectrice (25) séparant le premier anneau d'un deuxième anneau d'ingrédient actif B (26).
22. Comprimé de médicament (23) suivant la revendication 21, dans lequel l'ingrédient A est le cromoglycate de sodium et l'ingrédient B un bronchodilatateur.
23. Comprimé de médicament (23), comprenant des segments radiaux de différents ingrédients actifs et/ou substances vectrices, pouvant être obtenu par le procédé de la revendication 19 sous la dépendance de la revendication 17.
24. Comprimé de médicament suivant l'une quelconque des revendications 20 à 23, dans lequel le comprimé est annulaire et dans lequel les parois internes du comprimé sont coniques, la dose de médicament augmentant ou diminuant graduellement au fur et à mesure que des doses successives sont administrées.
25. Appareil pour la production d'un comprimé de médicament (22) pour inhalation à partir d'un médicament en poudre en vrac, comprenant :
 - a) un moule (7), ayant un axe longitudinal, propre à recevoir un médicament en poudre en vrac, ledit moule (7) étant adapté pour former tout ou partie du réservoir à médicament d'un appareil pour inhalation de médicament;
 - b) un élément expansible (9) propre à être positionné le long de l'axe longitudinal du moule (7), et
 - c) un élément (15, 16) pour dilater l'élément expansible (9) perpendiculairement à l'axe longitudinal du moule (7).
26. Appareil suivant la revendication 25, comprenant en outre un vibreur ou un dispositif de nivellement pour déposer le médicament à une hauteur nivelée.

Fig. 1.

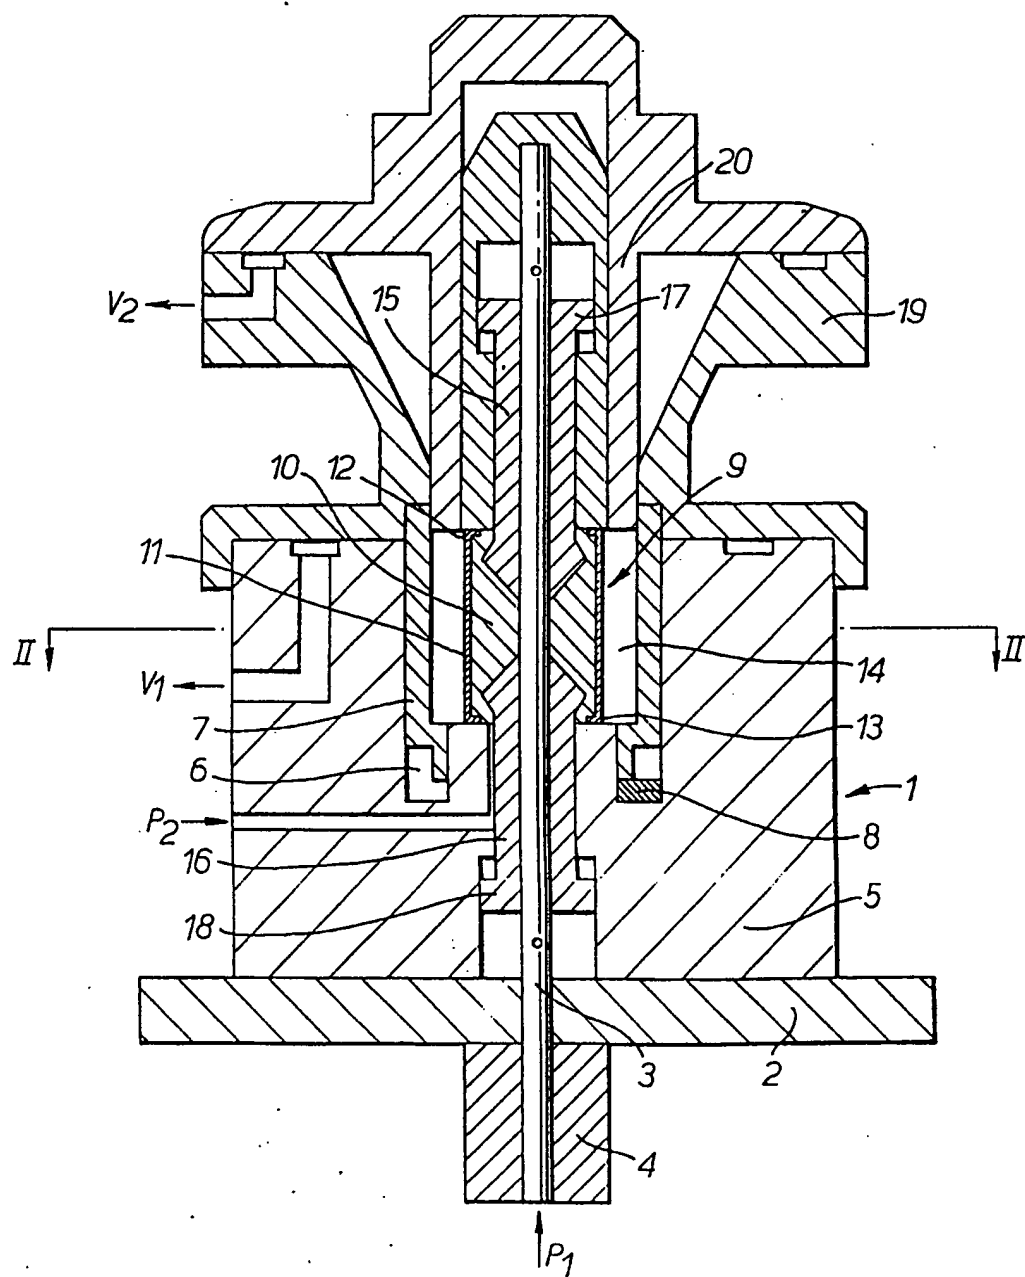
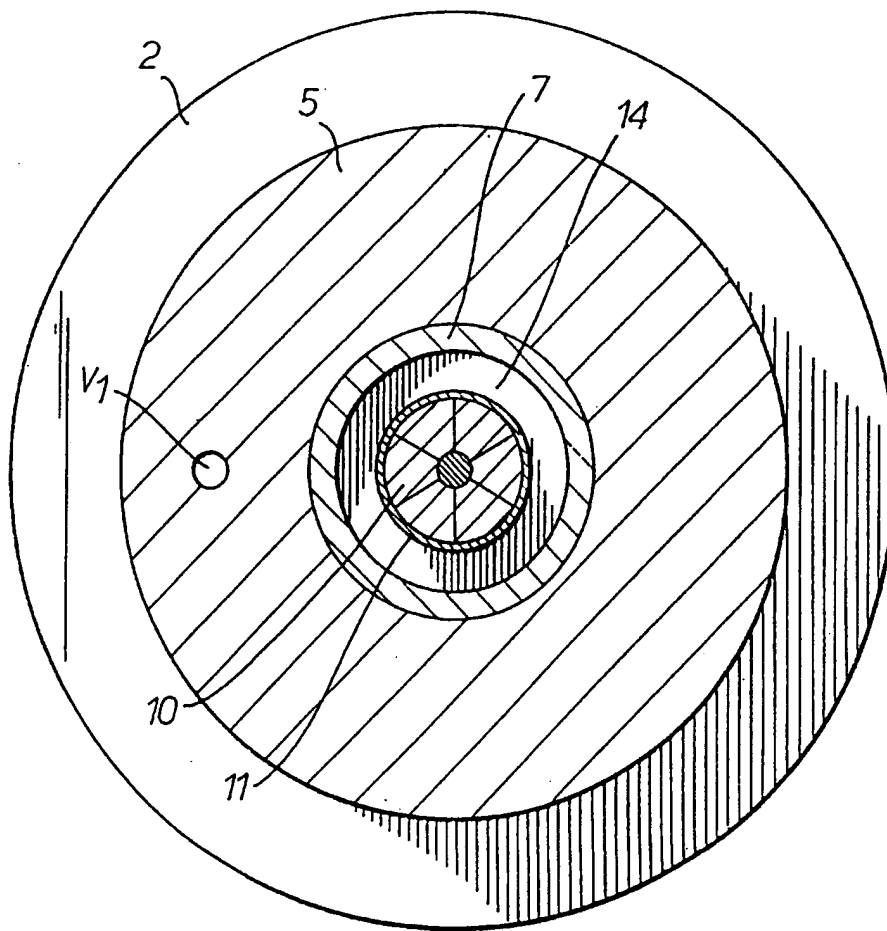


Fig.2.



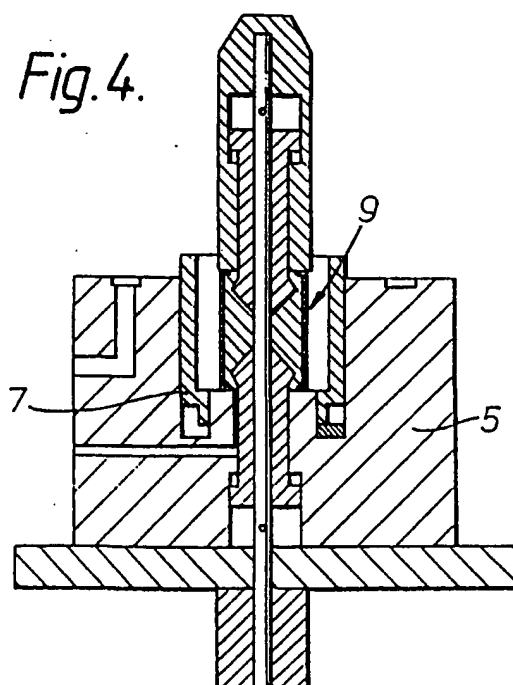
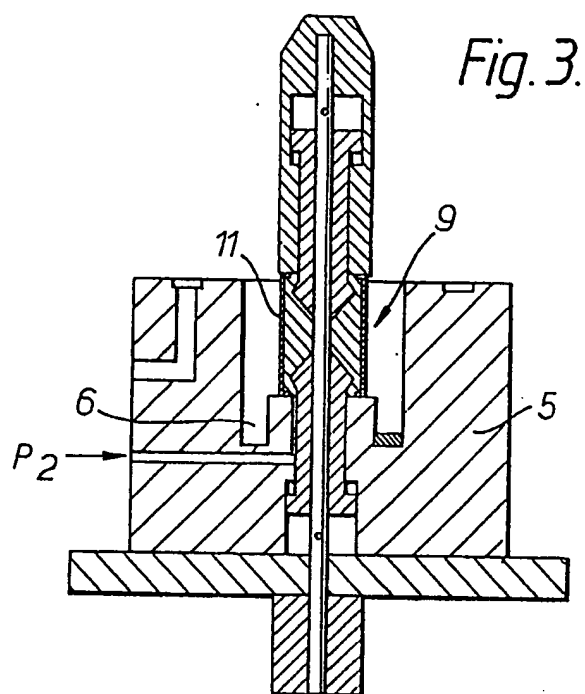


Fig. 5.

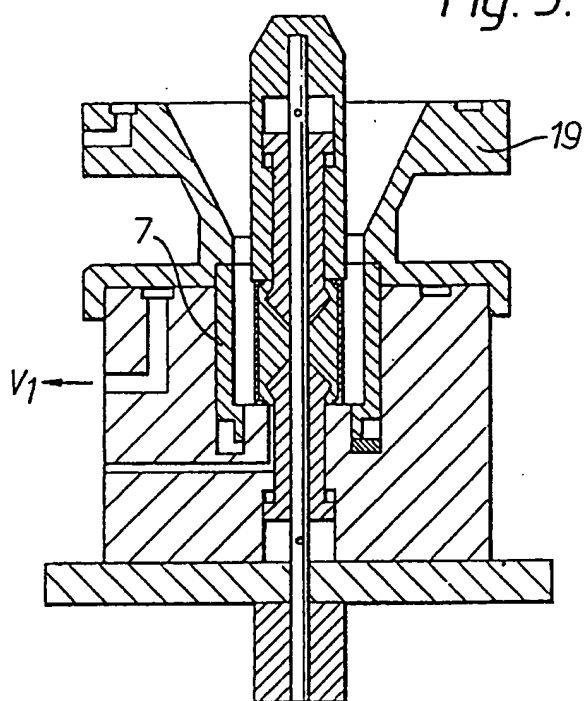
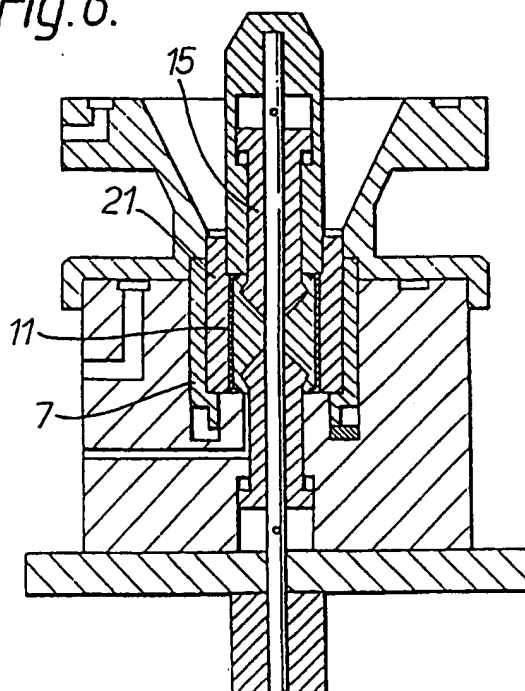


Fig. 6.



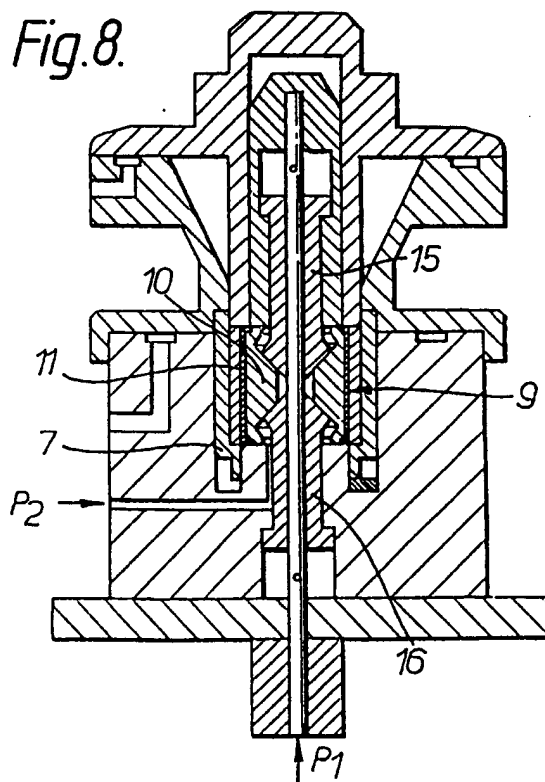
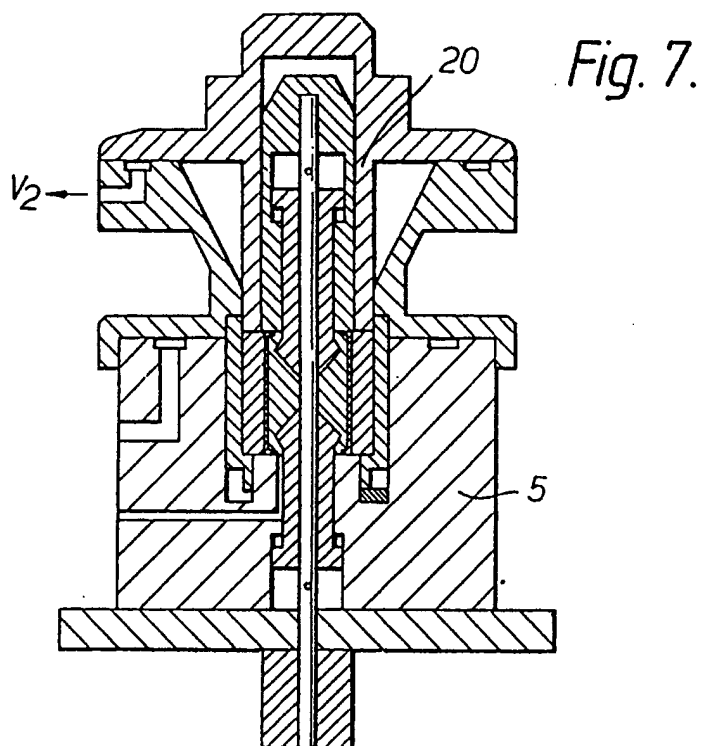


Fig. 9.

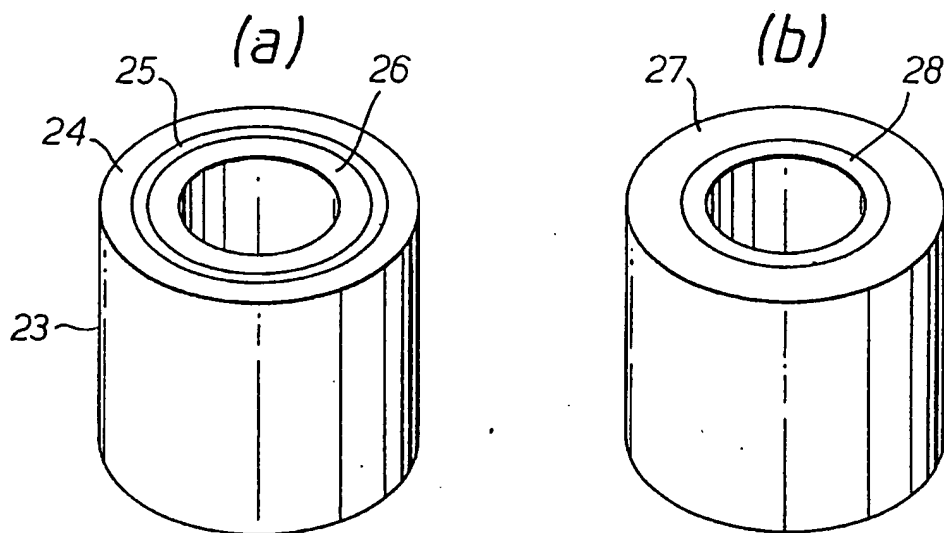


Fig.10.

